

# Product datasheet

Specifications



APC Smart-UPS Ultra On-Line,  
10000VA, Lithium-ion, Rack/Tower  
4U, 230V, 6 C13 + 4 C19 + 2 C19  
IEC outlets, Network Card,  
Extended runtime, W/rail kit

SRTL10KRM4UI

**Price: 250,240.00 ZAR**

## Overview

Lead time Usually in Stock

## Main

Main Input Voltage	220 V AC 1 phase 230 V AC 1 phase 240 V AC 1 phase
Input voltage	220...240 V
Input Connection Type	Hard Wire 3-wire 55 A
Number of input connectors	1 hard wire 3-wire (1P + N + E)
Network frequency	40...70 Hz auto-sensing
Output voltage	220 V AC 1 phase 230 V AC 1 phase 240 V AC 1 phase
Output voltage	220/230/240 V
Rated power in W	10000 W
rated power in VA	10000 VA
Output connection type	6 IEC 60320 C13 6 IEC 60320 C19
Output connector type	Hard wire 3-wire (1P + N + E) for 1 zone(s)
Bypass type	Internal bypass (automatic and manual)
Crest factor	3 : 1
Harmonic distortion	Less than 5 %
Maximum configurable power in VA	10000 VA
Maximum configurable power in W	10000 W
UPS type	Double conversion online
Wave type	Sine wave
Full load runtime	00:05:00 10000 W
Half load runtime	00:11:00 5000 W
Output frequency	50/60 Hz +/- 3 Hz sync to mains

## Complementary

Battery type Li-Ion (Lithium-Ion)

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

<b>Battery voltage</b>	180 V
<b>Extended runtime</b>	1
<b>Number of battery filled slots</b>	0
<b>Number of battery free slots</b>	0
<b>Battery recharge time</b>	1.5 h
<b>Number of battery replacement quantity</b>	2
<b>Battery life</b>	5...10 year(s)
<b>Battery charger power</b>	1200 W rated
<b>Battery type</b>	Li-Ion (Lithium-Ion) internal included
<b>Control panel</b>	Multifunction LCD status and control console
<b>Emergency power off</b>	Yes
<b>Free slots</b>	1
<b>Preinstalled device</b>	Network management card with environmental monitoring
<b>Alarm</b>	Audible and visible alarms : prioritized by severity
<b>UPS connectivity</b>	Serial port USB port Available expansion slot Embedded network management card 3
<b>Surge energy rate</b>	1410 J
<b>Number of rack unit</b>	4U
<b>Number of cables</b>	1
<b>Colour</b>	Silver grey
<b>Height</b>	175 mm
<b>Width</b>	432 mm
<b>Depth</b>	832 mm
<b>Net weight</b>	55 kg
<b>Mounting location</b>	Front
<b>Mounting preference</b>	Lower
<b>Mounting mode</b>	Rack-mounted with kit Tower-mounted with kit
<b>USB compatible</b>	Yes
<b>Mounting position</b>	Horizontal Vertical
<b>Mounting mode</b>	Rack/tower convertible with included kit
<b>Provided equipment</b>	Temperature probe USB cable Stabilization feet Strain relief Rack mounting hardware
<b>Number of power module free slots</b>	0
<b>Additional specification</b>	High density
<b>Redundant</b>	No
<b>Range of product</b>	Smart-UPS Ultra
<b>Product or component type</b>	Uninterruptible power supply (UPS)

## Environment

Product certifications	VDE
Marking	CE Mark UKCA
Standards	EN/IEC 62040-1 EN/IEC 62040-2 IEC 62040-2
Ambient air temperature for operation	0...40 °C
Ambient air temperature for storage	-15...45 °C
Storage altitude	0...15240 m
IP degree of protection	IP20
Relative humidity	0...95 % non-condensing
Storage Relative Humidity	0...95 % non-condensing
Acoustic level	55 dB
Heat dissipation	1900 Btu/h
Operating altitude	0...10000 ft

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	63 cm
Package 1 Width	65 cm
Package 1 Length	100 cm
Package 1 Weight	88.5 kg
SCC14	10731304578502

## Contractual warranty

Warranty (in months)	60
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 16305

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

SCIP Number 5ee38369-4dfb-4636-ab65-b08aa3242891

REACH Regulation [REACH Declaration](#)

### Energy efficiency

Energy Efficiency Optimized Energy efficient product

Product contributes to saved and avoided emissions Yes

## Use Longer

### Lifetime extension

Repair No

## Use Again

### Repack and remanufacture

End of life manual availability [End of Life Information](#)

Removable battery User replaceable

Take-back No

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Dimensions

---

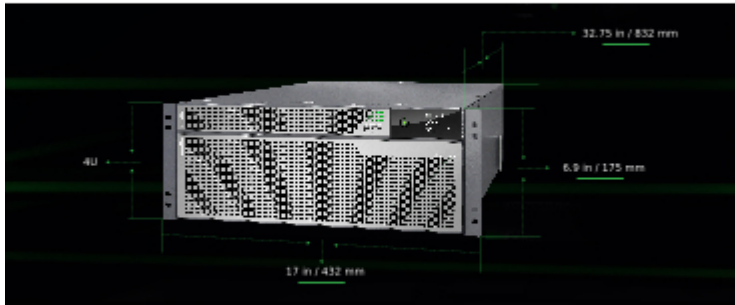


Image of product / Alternate images

Alternative

---



