

Product datasheet

Specifications



APC Smart-UPS Ultra On-Line,
8000VA, Lithium-ion, Rack/Tower
4U, 230V, 6 C13 + 4 C19 + 2 C19
IEC outlets, Network Card,
Extended runtime, W/rail kit

SRTL8KRM4UI

Price: 213,440.00 ZAR

Overview

Lead time Usually in Stock

Main

Main Input Voltage	220 V AC 1 phase
Input voltage	220...240 V
Input Connection Type	Hard Wire 3-wire 46 A
Number of input connectors	1 hard wire 3-wire (1P + N + E)
Network frequency	40...70 Hz auto-sensing
Output voltage	220 V AC 1 phase
Output voltage	220/230/240 V
Rated power in W	8000 W
rated power in VA	8000 VA
Output connection type	6 IEC 60320 C13 6 IEC 60320 C19
Output connector type	Hard wire 3-wire (1P + N + E) for 1 zone(s)
Bypass type	Internal bypass (automatic and manual)
Crest factor	3 : 1
Harmonic distortion	Less than 5 %
Maximum configurable power in VA	8000 VA
Maximum configurable power in W	8000 W
UPS type	Double conversion online
Wave type	Sine wave
Full load runtime	00:07:00 8000 W
Half load runtime	00:15:00 4000 W
Output frequency	50/60 Hz +/- 3 Hz sync to mains

Complementary

Battery type	Li-Ion (Lithium-Ion)
Battery voltage	180 V
Extended runtime	1

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Number of battery filled slots	0
Number of battery free slots	0
Battery recharge time	1.5 h
Number of battery replacement quantity	2
Battery life	5...10 year(s)
Battery charger power	1200 W rated
Battery type	Li-Ion (Lithium-Ion) internal included
Control panel	Multifunction LCD status and control console
Emergency power off	Yes
Free slots	1
Preinstalled device	Network management card with environmental monitoring
Alarm	Audible and visible alarms : prioritized by severity
UPS connectivity	Serial port USB port Available expansion slot
Surge energy rate	1410 J
Number of rack unit	4U
Number of cables	1
Colour	Silver grey
Height	175 mm
Width	432 mm
Depth	832 mm
Net weight	55 kg
Mounting location	Front
Mounting preference	Lower
Mounting mode	Rack-mounted with kit Tower-mounted with kit
USB compatible	Yes
Mounting position	Horizontal Vertical
Mounting mode	Rack/tower convertible with included kit
Provided equipment	Temperature probe USB cable Rack mounting hardware Strain relief Stabilization feet
Number of power module free slots	0
Additional specification	High density
Redundant	No
Range of product	Smart-UPS Ultra
Product or component type	Uninterruptible power supply (UPS)

Environment

Product certifications	VDE
------------------------	-----

Marking	CE Mark UKCA
Standards	EN/IEC 62040-1 IEC 62040-2 EN/IEC 62040-2
Ambient air temperature for operation	0...40 °C
Ambient air temperature for storage	-15...45 °C
Storage altitude	0...15240 m
IP degree of protection	IP20
Relative humidity	0...95 % non-condensing
Storage Relative Humidity	0...95 % non-condensing
Acoustic level	55 dB
Heat dissipation	1900 Btu/h
Operating altitude	0...10000 ft

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	63 cm
Package 1 Width	65 cm
Package 1 Length	100 cm
Package 1 Weight	88.5 kg
SCC14	1073130457849

Contractual warranty

Warranty (in months)	60
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 14259

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

SCIP Number 5ee38369-4dfb-4636-ab65-b08aa3242891

REACH Regulation [REACH Declaration](#)

Energy efficiency

Energy Efficiency Optimized Energy efficient product

Use Longer

Lifetime extension

Repair No

Use Again

Repack and remanufacture

End of life manual availability [End of Life Information](#)

Removable battery User replaceable

Take-back No

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Dimensions

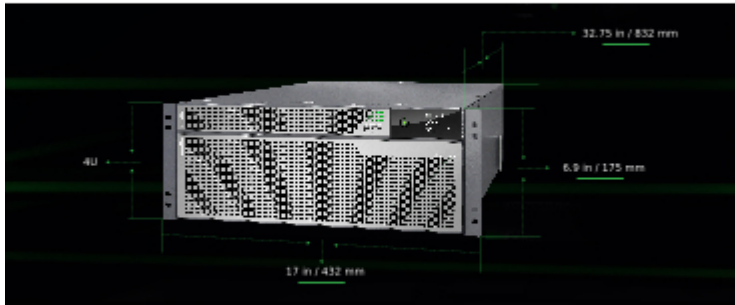


Image of product / Alternate images

Alternative



