

Product datasheet

Specifications



Thermal overload relay, TeSys Deca, 1-1.6A, 1NO+1NC, class 10A, spring terminal

LRD063

Main

Range	TeSys TeSys Deca
Product name	TeSys LRD TeSys Deca
Product or component type	Differential thermal overload relay
Device short name	LRD
Relay application	Motor protection
Product compatibility	LC1D12 LC1D25 LC1D09 LC1D32 LC1D38 LC1D18
Network type	DC AC
Thermal overload class	Class 10A conforming to IEC 60947-4-1
Thermal protection adjustment range	1...1.6 A
[U _i] rated insulation voltage	Power circuit: 600 V conforming to CSA Power circuit: 600 V conforming to UL Power circuit: 690 V conforming to IEC 60947-4-1

Complementary

Network frequency	0...400 Hz
Mounting support	Plate, with specific accessories Rail, with specific accessories Under contactor
Tripping threshold	1.14 +/- 0.06 I _r conforming to IEC 60947-4-1
Auxiliary contact composition	1 NO + 1 NC
[I _{th}] conventional free air thermal current	5 A for signalling circuit
Permissible current	3 A at 120 V AC-15 for signalling circuit 0.22 A at 125 V DC-13 for signalling circuit
[U _e] rated operational voltage	690 V AC 0...400 Hz for power circuit conforming to IEC 60947-4-1
Associated fuse rating	4 A gG for signalling circuit 4 A BS for signalling circuit
[U _{imp}] rated impulse withstand voltage	6 kV
Phase failure sensitivity	Tripping current 130 % of I _r on two phase, the last one at 0
Control type	Red push-button: stop Blue push-button: reset

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Temperature compensation	-20...60 °C
Connections - terminals	Control circuit: spring terminals 1 cable(s) 1...2.5 mm ² solid without cable end Control circuit: spring terminals 1 cable(s) 1...2.5 mm ² flexible without cable end Power circuit: spring terminals 1 cable(s) 1.5...4 mm ² flexible without cable end Power circuit: spring terminals 1 cable(s) 1.5...4 mm ² flexible with cable end
Height	93 mm
Width	45 mm
Depth	72 mm
Net weight	0.14 kg

Environment

Climatic withstand	conforming to IACS E10
IP degree of protection	IP20 conforming to IEC 60529
Ambient air temperature for operation	-20...60 °C without derating conforming to IEC 60947-4-1
Ambient air temperature for storage	-60...70 °C
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations: 6 Gn conforming to IEC 60068-2-6 Shocks: 15 Gn for 11 ms conforming to IEC 60068-2-7
Dielectric strength	1.89 kV at 50 Hz conforming to IEC 60947-1
Standards	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 UL 60947-5-1 CSA C22.2 No 60947-4-1 CSA C22.2 No 60947-5-1 GB/T 14048.4 GB/T 14048.5 EN 50495
Product certifications	IEC UL CSA CCC EAC BV RINA DNV-GL LROS (Lloyds register of shipping) ATEX INERIS UKCA

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 cm
Package 1 Width	8 cm
Package 1 Length	10.4 cm
Package 1 Weight	189 g
Unit Type of Package 2	S02
Number of Units in Package 2	23
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm

Package 2 Weight 4.652 kg

Contractual warranty

Warranty (in months) 18



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 3 kg CO2 eq.

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant with Exemptions

SCIP Number 224fb0ea-2bc1-482e-b6b4-c1bdd9779659

REACH Regulation [REACH Declaration](#)

Use Longer

Lifetime extension

Repair No

Use Again

Repack and remanufacture

End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Offer Marketing Illustration

Product benefits / Features

TeSys Deca Thermal Overload Relays



Easy application

Selectable manual, remote or auto reset tripping options for better process management.



Simple to install

Self-powering eliminates the need for an external power supply.



Compatibility

Can be combined with TeSys Deca contactors to form an extremely compact starter



Offer Marketing Illustration

Product benefits / Features



TeSys Deca Thermal Overload Relays

Range Accessories



Terminal block



Electrical remote stop



Mechanical remote control



Pre-wiring kit




Manual overload reset push-button

Image of product / Alternate images

Alternative



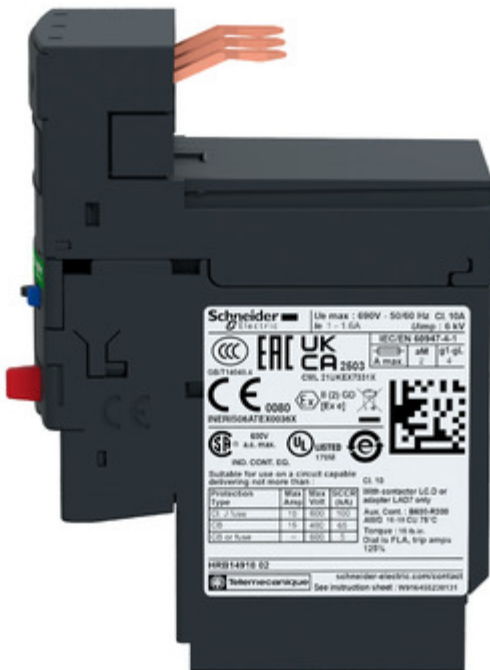

Schneider Electric | U_e max : 690V - 50/60 Hz - C₁ 10A
 In : 1 - 1.5A | 50amp - 6.5kV

CCC **EAC** **UK** **CA** **2503** | REC-EN 60897-2-1
 A max / 2 / 4

603116014 | CBL 210KEX7311X

CE 0080 | R (2) GO | R (4) | 01-01

PREMISES: 30099X

SB 69V A.L. MAX | **UL** LISTED | **e**
 IND. CONT. EQ. 1759

Suitable for use on a circuit capable
 delivering and absorbing:

Protection Type	Max Amps	Max ICS (kA)	SCCR (kA)
UL Type	15	5000	20000
UL	15	4000	40
UL or fuse	15	5000	5

CS 10 | With contactor LC-D or
 adapter LK07 trip.
 Aux. Cont. : 8600-8308
 JWD 10-11 CU 75 °C
 Temp. 10 to 40 °C
 Dual in FLA, trip amps
 125%

40014918-02 | schneider-electric.com/contact
 See instruction sheet : 909449220111